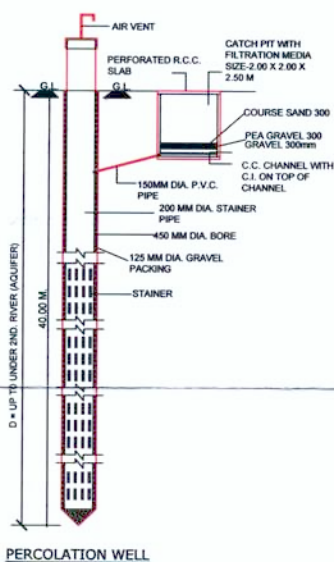



SHEET NO. 1/1			
LAYOUT PLAN SHOWING PROP. S.P.-1 & S.P.-2 OF S.P.-1			
OF S.P. NO.-1/B OF F.P.-1, T.P.-7 (KHOKHARA-MAHEM-DABAD), R.S. NO.-30/P, MOJE - MITHIPUR			
TAL.-AHMEDABAD CITY (DIST).T.P.-ABAD.			
SCALE 1CM=2.00 MT.			
ZONE: GEN. INDUSTRIAL		USE: SUB DIVISION	
PROP. SUB DIVISION AREA TABLE	PLOT AREA	AREA GOING IN ROAD	NET PLOT AREA
PROP. S.P.1 OF S.P.-1 OF S.P. NO.-1/B OF F.P.-1	2886.00	204.00	2682.00
PROP. S.P.2 OF S.P.-1 OF S.P. NO.-1/B OF F.P.-1 (GOVT. LAND)	1205.00	0	1205.00
TOTAL S.P.1 OF S.P.-1/B OF F.P.-1=	4091.00	204.00	3887.00
AREA TABLE PROP. S.P.1 OF S.P.-1 OF S.P. NO.-1/B OF F.P.-1			
PLOT AREA S.P.1 OF S.P.-1 OF S.P. NO.-1/B OF F.P.-1	2886.00		
LESS: AREA GOING IN ROAD LINE	204.00		
NET PLOT AREA	2682.00		
REQ. C.P. 10%	268.20		
PROMI. C.P. (10.56+10.56)/2x25.59=270.23)	270.23		
PROP. S.P.1 OF S.P.-1 OF S.P. NO.-1/B OF F.P.1 P.W. CALC.			
PLOT P.W. = 1500 TO 4000 IMP. STREET			
NET PLOT AREA=2682.00 REQ. 1 NOS. P.W.			
PROMI. = 1 NOS. P.W.			
PROP. S.P.1 OF S.P.-1 OF S.P. NO.-1/B OF F.P.1 TREE CALC.			
PLOT AREA = 200.00 S.M. = 3 TREE REQ.			
NET PLOT AREA=2682.00X13.41x3=40.23 SAY 41 TREES REQ.			
PROMI=41 TREES			
CLOUR NOTE:			
PLOT BOUN.	C.P. ROAD	P.W. TREE	
PROP. WORK			
PROP. SUB - DIVISION LINE			
NOTE:- IT IS CERTIFY THAT THE PLOT IS SURVEYED BY ME ON ALL DIMENSION SITES SHAPE AND ARE SHOWN ON PLAN ARE TALLIES WITH SITE POSITION OF OCCUPANCE AS AN ENGO. I AM FULLY RESPONSIBLE THAT .			
* AS AN ENGO. I CERTIFY THAT ALL REQUIREMENTS UNDER G.O.C.R. CL 4.2.2 HAS BEEN VERIFIED BY ME AND THE SITE/LAND IS SUITABLE FOR PROPOSED CON- STRUCTED THE PLOT DIMENSION AS SHOWN IN THE PLAN CORRESPONDS WITH SITE.			
NOTE:- DIMENSION OF PLOT AS PER LAND RECORD (D.L.R.)			

[illegible]

H. H. Javiraj.
 Sudhakar Joti
 Krishna A. Schwabje.
 J. N. S. G. G.

OWNER Misa

ATISH D. PUROHIT
Eng. LIC. No. 0902210118
97/554, Durga Chowk
G.H.B. Chandikneda
Ahmedabad - 382424

ARCH/ ENGINEER

Ahmedabad Municipal Corporation

Case No. : LTSE/2011/15/GDR/A346/M1

Zone: East

Plan Approved as per terms and condition specified in the Commencement Certificate

Raja Chaitni Moti : 48650/11/15/A346/M1

Date : 27/11/15

RAJENDRA

Asst. Sd. Inspector **T.D.O. Asst. Eo.** **Rajendra Jadhav** **DILIP S. GOR.**
(Civil Center) **(Civil Center)** **Dy T.D.O. East** **Dy MC East**

AUTHORITY

FIRE NOTE:

(1) HYDRANT SYSTEM: ON/OFF SWITCHES LOCATED NEAR THE HOSE REEL HOSE OR HYDRANT OUTLET, AT EACH FLOOR FOR THE MAIN FIRE PUMP AT UNDERGROUND WATER TANK WITH A CAPACITY TO DISCHARGE 900 LITERS PER MINUTE AT 3 BAR PRESSURE AS MEASURED AT THE TERRACE LEVEL SHOULD BE INSTALLED.

THE RISER FOR THE BUILDING EXCEEDING 15 METERS HEIGHT SHOULD NOT BE OF LESS THAN 100 MM. INTERNAL DIAMETER. THE RISER SHOULD BE CONNECTED TO THE BOTTOM OF THE TERRACE TANK WITH A STOP VALVE AND A NRV TO ACT A DOWN-COMER.

ONE RISER IS REQUIRED FOR EVERY 1000 SQ. METERS FLOOR AREA AND IF THE BUILDING IS DIVIDED INTO TWO OR MORE PARTS THEN EACH PART SHOULD HAVE A SEPARATE RISER WITH ALL THE FITTINGS AT EACH FLOOR LEVEL.

EACH FLOOR SHOULD HAVE ONE HYDRANT OUTLET WITH A COUPLING FOR ATTACHING A 63 MM DIA. HOSE, 25 MM BORE HOSE-REEL HOSE WITH 8 MM SHUT-OFF NOZZLE AT EACH FLOOR LANDING. THE LENGTH OF THE HOSE SHOULD BE ENOUGH TO REACH THE FARTHEST CORNER OF THE FLOOR. HOSE BOX WITH 15 METERS LONG 63 MM DIA. HOSE AND 12.5 MM BORE NOZZLE AT ALTERNATE FLOORS. THE HOSE-REEL HOSE SHOULD BE COUPLED TO THE RISER.

FIRE-SERVICE INLET SHOULD BE INSTALLED AT A POINT NEAR THE ENTRY TO THE PREMISES WHERE A FIRE SERVICE VEHICLE CAN APPROACH EASILY.

A PERMANENT HYDRANT POINT COMPRISING OF 63 MM DIA SIZE 2 NOS OF HYDRANT VALVES SHOULD BE INSTALLED AT THE TERRACE LEVEL.

OVERHEAD TANK REFILLING BYPASS CONNECTION SHOULD BE DONE AT THE TERRACE LEVEL.

THE OVERHEAD TANK SHALL BE OF A CAPACITY OF NOT LESS THAN 20,000 LITERS. THE UNDERGROUND TANK SHALL BE OF NOT LESS THAN 1,00,000 LITERS.

(2) FIRE LIFT: THE FIRE LIFT AND ALL LIFTS SHOULD HAVE A PROVISION TO GROUND TO AUTOMATICALLY IN CASE OF ELECTRICITY FAILURE.

EACH BUILDING SHOULD HAVE AT LEAST ONE LIFT AS A FIRE-LIFT AND IF THE BUILDING IS DIVIDED INTO A MORE PARTS THEN EACH PART SHOULD HAVE A FIRE-LIFT. LIFT WELL SHOULD HAVE BLOWERS TO PRESSURIZE THE LIFT WELL SO CONNECTED THAT IT WILL AUTOMATICALLY OPERATE WHEN ALARM CALL POINT IS OPERATE, SO THAT IT PREVENTS THE LIFT WELL GETTING SMOKE LOGGED.

(3) FIRE ALARM: FIRE ALARM CALL POINT TO BE INSTALLED AT EACH FLOOR WITH SOUNDERS CAPABLE OF BEING HEARD ALL THROUGHOUT THE BUILDING.

(4) FIRE EXTINGUISHERS: ONE CARBON DIOXIDE (CO₂) TYPE EXTINGUISHER OF 4.5 KG. WITH ISI MARK, AND ONE EXTINGUISHER OF 5 KG. DRY CHEMICAL POWDER (DCP) TYPE EXTINGUISHER WITH ISI MARK TO BE INSTALLED ON EACH FLOOR IN CASE OF COMMERCIAL BUILDING.

ONE CARBON DIOXIDE (CO₂) TYPE EXTINGUISHER OF 4.5 KG. WITH ISI MARK, OR TWO CARBON DIOXIDE (CO₂) TYPE EXTINGUISHER OF 2 KG. CAPACITY ON EACH FLOOR AND 5 KG. DRY CHEMICAL POWDER (DCP) WITH ISI MARK TYPE EXTINGUISHER ON ALTERNATE FLOOR IN CASE OF RESIDENTIAL BUILDINGS.

IF THE BUILDING IS DIVIDED INTO TWO OR MORE PARTS THEN EACH PART SHOULD HAVE THESE EXTINGUISHERS INSTALLED.

(5) STAIRCASE: THE STAIRCASE HAS TO BE OPEN FROM AT LEAST ONE OR TWO SIDES BUT IF THE STAIRCASE IS IN THE CENTRE CORE OF THE BUILDING IT HAS TO BE PRESSURIZED TO PREVENT IT FROM GETTING SMOKE LOGGED.

THE RISER / DOWN-COMER SHOULD BE LOCATED IN THE STAIRCASE OR CLOSE TO IT TO MAKE IT EASILY APPROACHABLE IN CASE OF FIRE FROM THE FLOOR BELOW OR ABOVE.

(6) BASEMENT: THE BASEMENT OF 200 SQ. METERS OR MORE SHOULD BE PROTECTED WITH AUTOMATIC SPRINKLER SYSTEM WITH AT LEAST ONE SPRINKLER HEAD FOR ACTUAL CAR PARKING SPACE.









ADDITIONALLY BE PROTECTED BY A HYDRANT OUTLET AND TWO 25 MM BORE HOSE-REEL HOSES WITH 8 MM. BORE NOZZLES AT EACH BASEMENT LEVEL.

(7) LIGHTNING ARRESTER: A LIGHTNING ARRESTER SHOULD ALSO BE INSTALLED AND BE PROPERLY EARTHED TO PREVENT DAMAGE TO THE BUILDING WHEN THE LIGHTNING STRIKES.

(8) PHOTO LUMINESCENT (AUTO GLOW) SIGNAGES: IF THE BUILDING FALLS IN A CONFINED AREA OR IF IT HAS AN ENCLOSED STAIRCASE OR IS NOT WELL LIT UP ON THE INSIDE, THEN ADEQUATE PHOTO LUMINESCENT (AUTO GLOW) SIGNAGES SHOULD BE DISPLAYED AT EACH FLOOR / LANDING / PATHWAY / DEAD-END AND ALONG ALL EXIT ROUTES LEADING TO THE GROUND LEVEL. THE SIGNAGE SHOULD INDICATE FIRE FIGHTING, FIRE SAFETY, FIRST-AID AND OTHER SAFETY EQUIPMENT PRESENT ON THE RESPECTIVE FLOOR / LANDING / PATHWAY / DEAD-END AND ALONG ALL EXIT ROUTES LEADING TO THE GROUND LEVEL.

(9) ELECTRIC POWER SUPPLY TO THE ENTIRE FIRE-SAFETY SYSTEM: ELECTRICITY SUPPLY TO THE FIRE PUMP, FIRE ALARM SYSTEM, STAIRCASE PRESSURIZATION SYSTEM AND FIRE LIFT SHOULD BE MADE AVAILABLE FROM THE MAIN ELECTRICAL SUPPLY. (I.E. FROM ELECTRICAL POWER SUPPLY OF THE COMPANY) THIS IS TO ENSURE AVAILABILITY OF POWER SUPPLY TO THE FIRE PROTECTION & SAFETY SYSTEM EVEN AFTER THE MAIN ELECTRICAL SUPPLY TO THE BUILDING IS SWITCHED OFF THE TIME OF FIRE.

(10) IMPORTANT INSTRUCTIONS: AFTER INSPECTION OF A LOW-RISE BUILDING BY THE FIRE SERVICES AUTHORITY, IF THE FIRE OFFICER CONCERNED FEELS THE NEED FOR ADDITIONAL FIRE PREVENTION / PROTECTION / VENTILATION SYSTEM REQUIRED OR EQUIPMENT (I.E. PASSIVE SYSTEM / SPRINKLER / DRENCHER ETC.) AS PER FIRE LOAD / FIRE RISK / PUBLIC GATHERING, POTENTIAL PANIC / CONGESTED AREA, THOSE ADDITIONAL MEASURES / EQUIPMENTS HAVE TO BE IMPLEMENTED / INSTALLED.

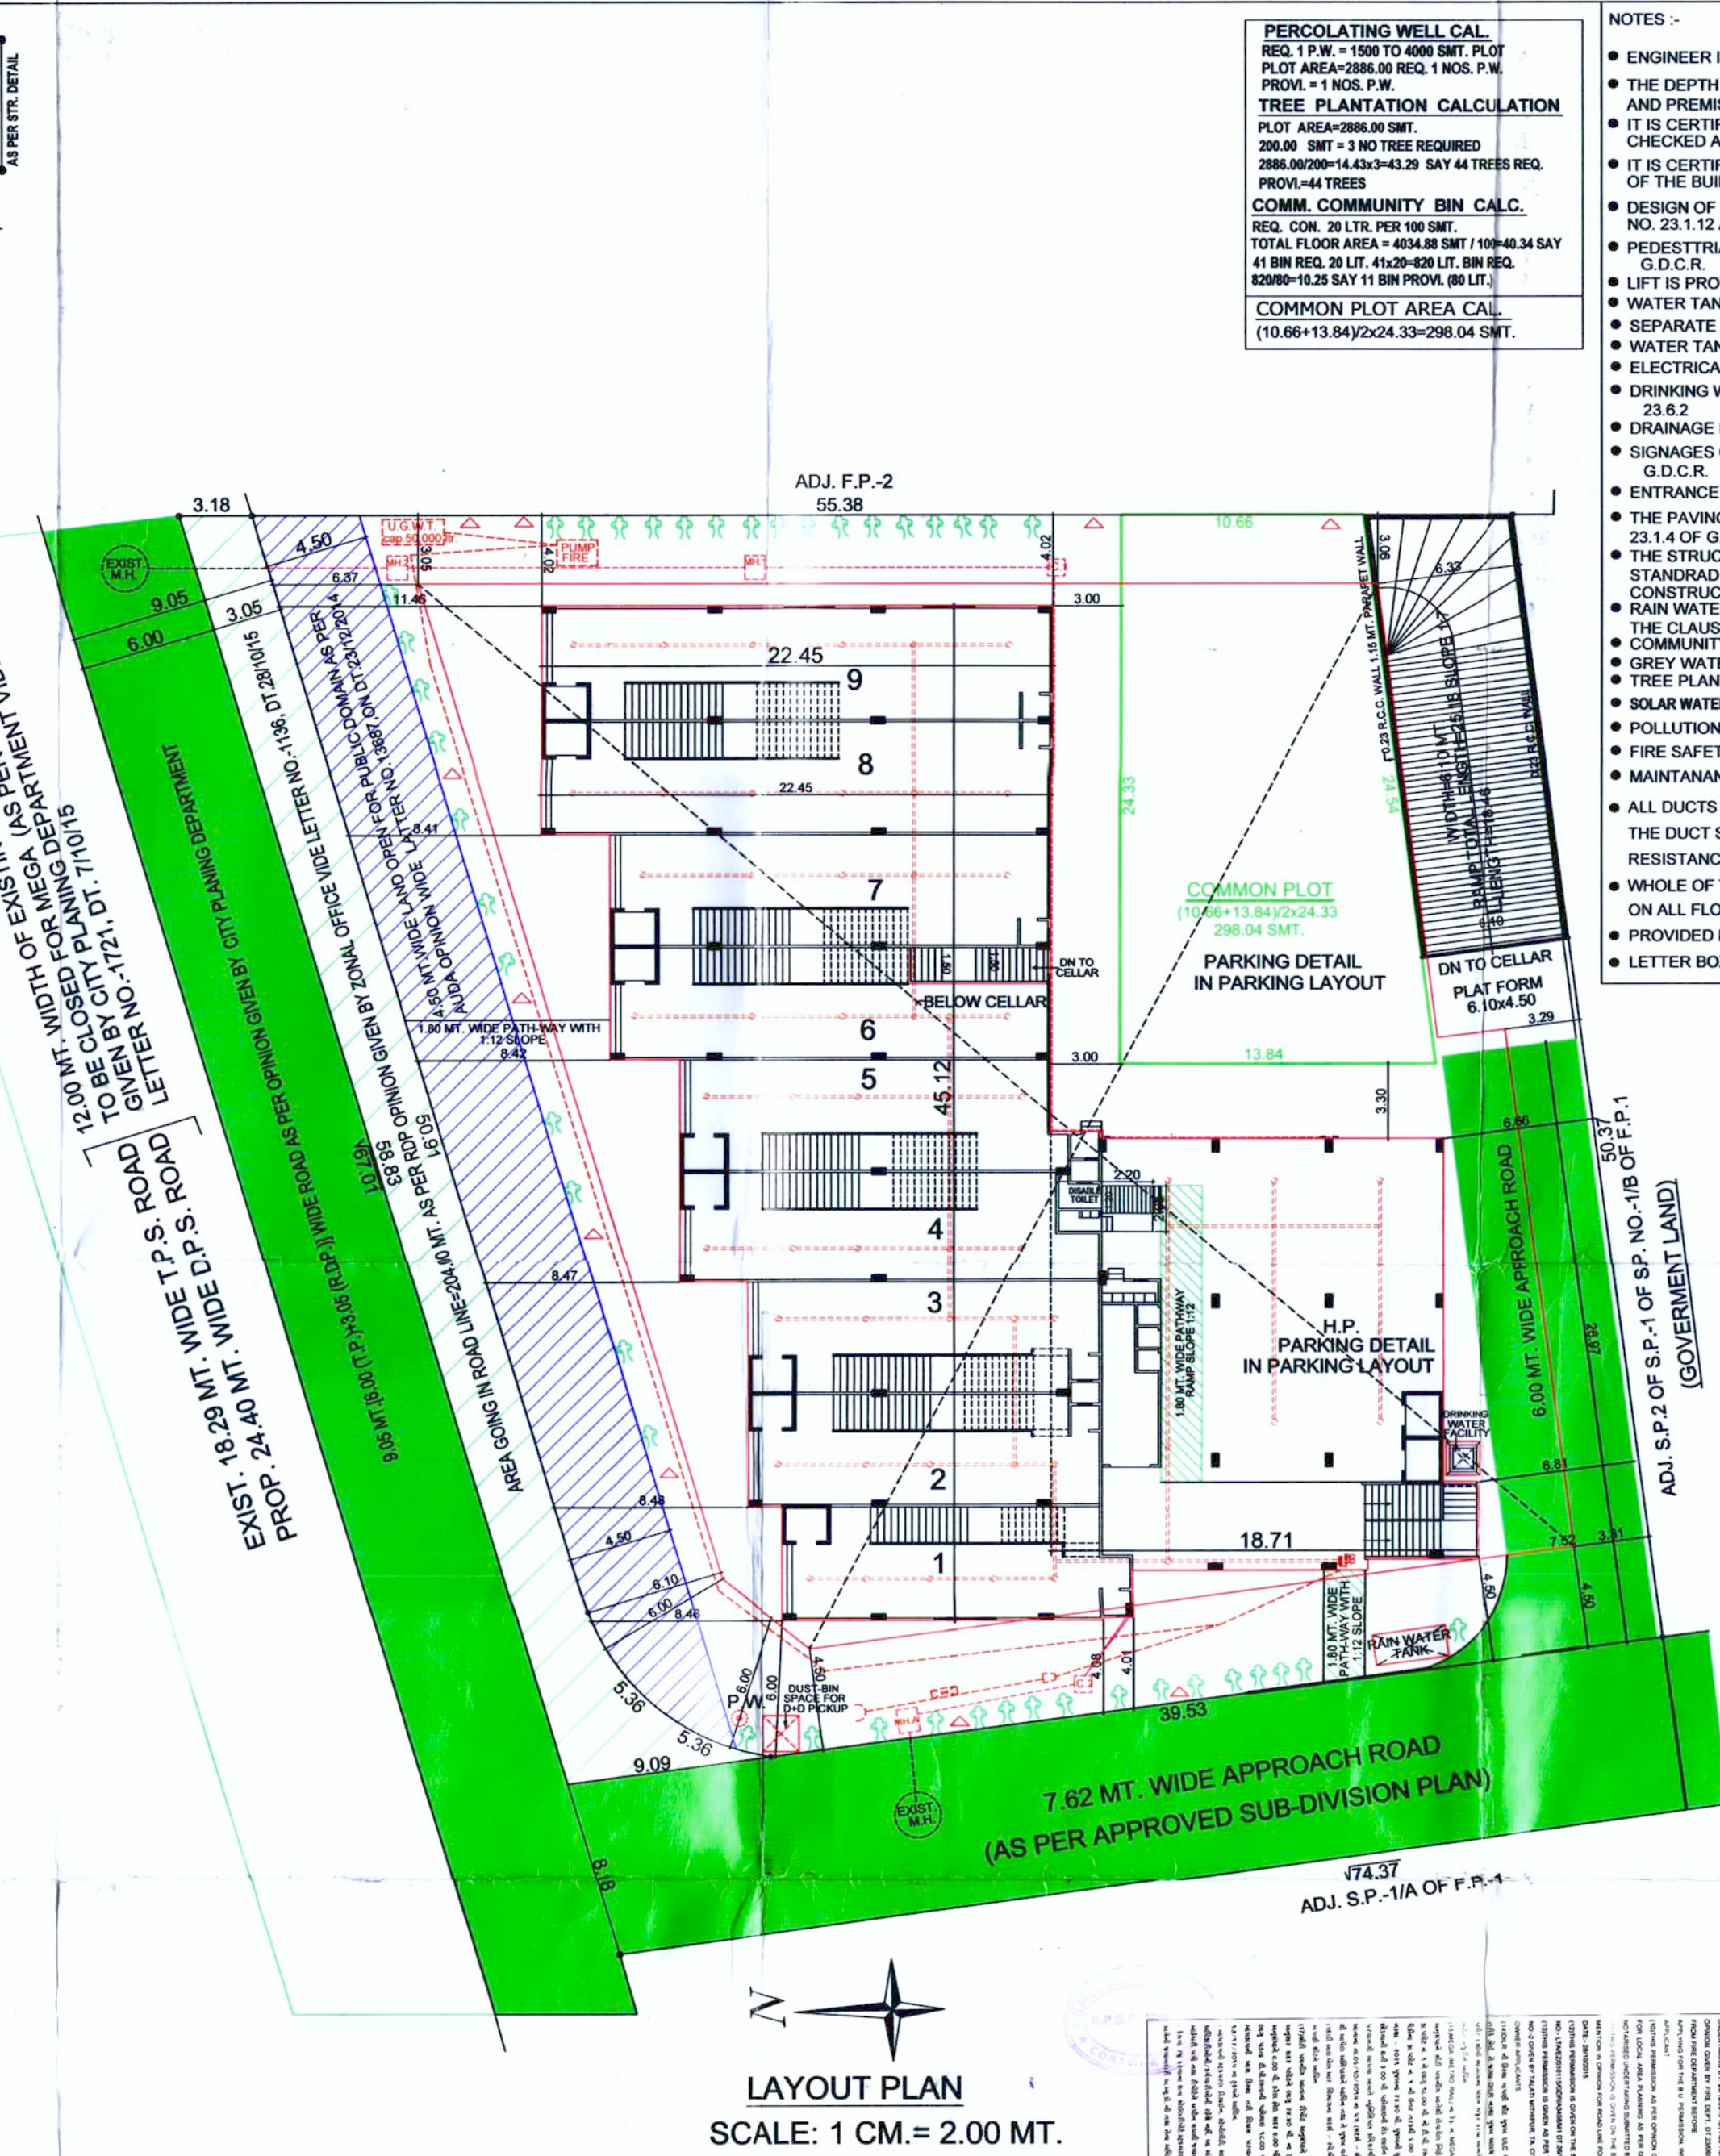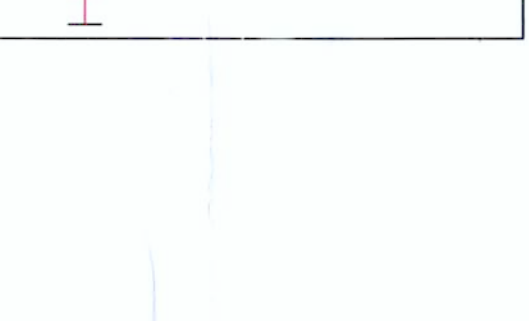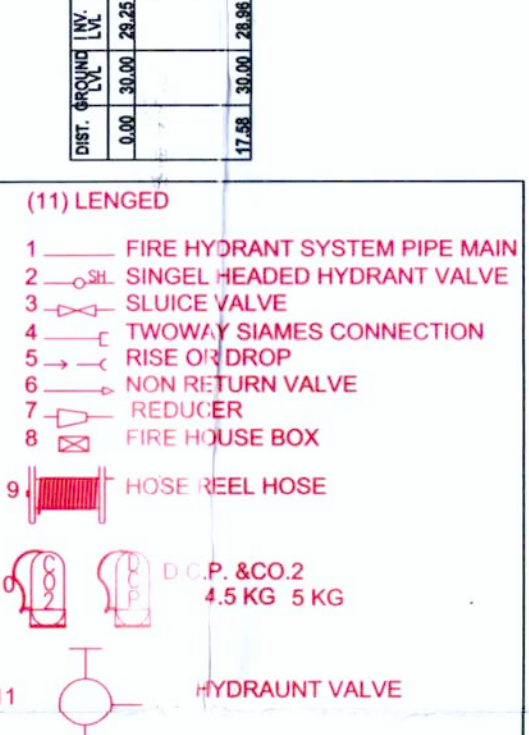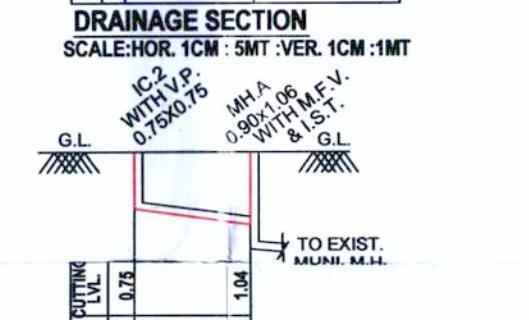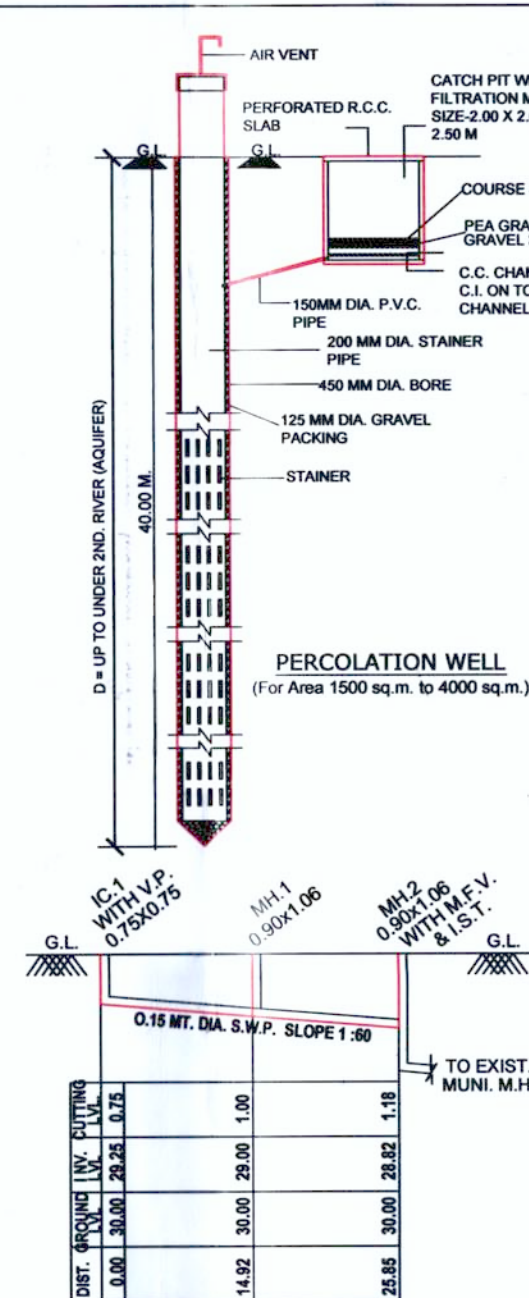


LAYOUT PLAN
SCALE: 1 CM. = 2.00 MT.

PERCOLATING WELL CALC.
REQ. 1 P.W. = 1500 TO 4000 SMT. PLOT
PLOT AREA = 298.04 SMT. REQ. 1 NOS. P.W.
PROV. = 1 NOS. P.W.
TREE PLANTATION CALCULATION
PLOT AREA = 298.04 SMT.
200.00 SMT = 3 NO TREE REQUIRED
298.04/200 = 1.49 x 3 = 4.47 TREES REQ.
PROV. = 4 TREES
COMMON COMMUNITY BIN CALC.
REQ. CON. 20 LIT PER 100 SMT.
TOTAL FLOOR AREA = 4034.88 SMT / 100 x 0.43 SAY
41 BIN REQ. 20 LIT. 41 x 20 = 820 LIT. BIN REQ.
820/100 = 8.20 SAY 11 BIN PROV. (80 LIT.)
COMMON PLOT AREA CALC.
(10.66 x 13.84) x 24.33 = 298.04 SMT.

NOTES:-

- ENGINEER IS FULLY RESPONSIBLE FOR LEAVING OPEN SPACE AND MARGINE.
- THE DEPTH AND POSITION OF EXISTING MUNICIPAL MAINHOLE IS VERYFIDE ME ON SITE AND PREMISES GATES DRAINAGE CONNECTION.
- IT IS CERTIFY THAT ACCORDING TO G.D.C.R. ALL REQUIREMENTS OF THE BUILDING ARE CHECKED AND NECESSARY ACTIONS ARE TAKEN.
- IT IS CERTIFY THAT ACCORDING TO THE CLAUSE NO. 4.5.3 OF THE G.D.C.R. THE STRUCTURE OF THE BUILDING IS DESIGN AS PER THE NORMES OF THE INDIAN STANDARDS.
- DESIGN OF STAIRCASE AND RAILING IS PROVIDED AS PER THE PROVISION OF THE CLAUSE NO. 23.1.2 AND 23.1.4 AND 24.6 OF G.D.C.R.
- PEDESTRIANS RAMP IS PROVIDED AS PER THE PROVISION OF THE CLAUSE NO. 23.1.5 OF G.D.C.R.
- LIFT IS PROVIDED AS PER THE PROVISION OF THE CLAUSE NO. 23.12 AND 24.7 OF G.D.C.R.
- WATER TANK IS PROVIDED AS PER THE PROVISION OF THE CLAUSE NO. 23.6 OF G.D.C.R.
- SEPARATE LETTER BOX IS PROVIDED AT GROUND LEVEL FOR EACH UNIT.
- WATER TANK FOR FIRE SAFETY REQUIREMENT PROVIDED AS PER CHAPTER NO. 24 OF G.D.C.R.
- ELECTRICAL INFRASTRUCTURE SHALL BE PROVIDED AS PER CLAUSE NO. 23.11
- DRINKING WATER FACILITY FOR DISABLED PERSONS IS PROVIDED AS PER THE CLAUSE NO. 23.8.2
- DRAINAGE FACILITY IS PROVIDED AS PER THE CLAUSE NO. 23.10
- SIGNAGES OF THE PARKING PLACE IS TO BE PROVIDED AS PER THE CLAUSE NO. 23.7 OF THE G.D.C.R.
- ENTRANCE OF THE BUILDING IS PROVIDED AS PER THE CLAUSE NO. 23.1.7 OF G.D.C.R.
- THE PAVING OF BUILDING UNIT/FINL PLOT AS PER THE PROVISION OF THE CLAUSE NO. 23.1.4 OF G.D.C.R.
- THE STRUCTURE OF THE BUILDING IS AS PER THE NORMS OF THE SPECIFIED IN THE INDIAN STANDARND AND TAKE NCESSARY ACTION FOR THE STRUCTRAL SAFETY DURING THE CONSTRUCTION.
- RAIN WATER STORAGE TANK AND RAIN WATER HARVESTING SYSTEM IS PROVIDED AS PER THE CLAUSE NO. 27.2 OF G.D.C.R.
- COMMUNITY BIN PROVIDED AS PER THE PROVISION OF THE CLAUSE NO. 27.3 OF G.D.C.R.
- GREY WATER RECYCLING SYSTEM IS PROVIDED AS PER THE CLAUSE NO. 27.4 OF G.D.C.R.
- TREE PLANTATION IS PROVIDED AS PER THE CLAUSE NO. 27.5 OF G.D.C.R.
- SOLAR WATER HEATING SYSTEM IS PROVIDED AS PER THE CLAUSE NO. 27.6 OF THE G.D.C.R.
- POLLUTION CONTROL SYSTEM IS PROVIDED AS PER THE CHAPTER NO. 28 OF G.D.C.R.
- FIRE SAFETY SYSTEM IS PROVIDED AS PER THE CHAPTER NO. 24 OF G.D.C.R.
- MAINTANANCE AND UPGRADEATION OF BUILDING IS AS PER CHAPTER NO. 29 OF G.D.C.R.
- ALL DUCTS PASS THROUGH FIRE WALLS OR FLOORS, THE OPENING AROUND THE DUCT SHALL BE SEALED WITH MATERIAL HAVING FIRE RESISTANCE (24.19.3)
- WHOLE OF THE BUILDING ALL ENCLOSURES PROVIDE AS SMOKE PROOF ON ALL FLOORS INCLUDING OFFICES.
- PROVIDED LIFT CAPACITY AS PER G.D.C.R.
- LETTER BOX IS PROVIDED AT GR.LVL. FOR EACH SEPARATE UNIT

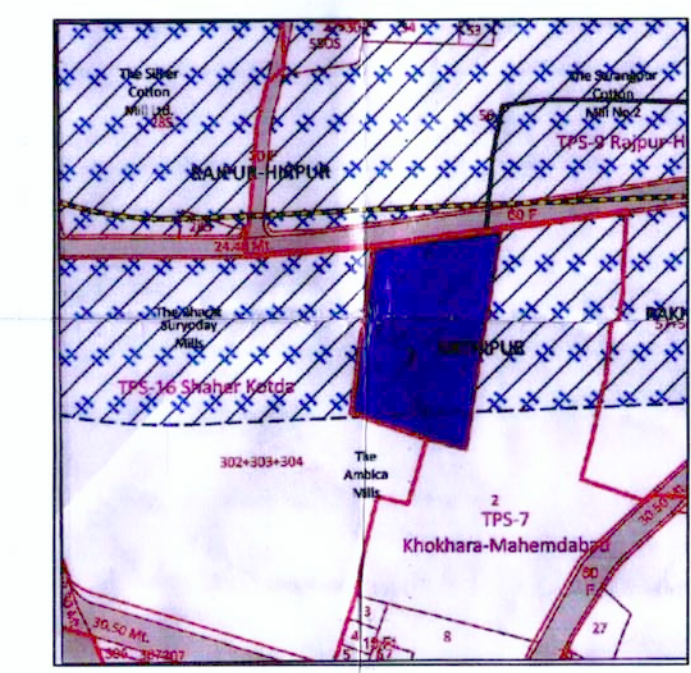

KEY PLAN
SCALE: 1 CM. = 80.00 MT.

LAYOUT PLAN SHEET NO.-1/10
LAYOUT PLAN SHOWING PROP. COMM. BLDG. OF S.P.-1 OF S.P.-1 OF S.P. NO.-1/B OF F.P.1,T.P.S.NO. 7 (KHOKHARA-MAHEMDABAD), R.S.NO.-30/P, MOJE :- MITHIPUR TAL:-AHMEDABAD CITY (EAST),DIST:- A'BAD.

ZONE:GEN. INDUSTRIAL	USE :- COMMERCIAL	SCALE :- 1 CM. = 2.00 MT.
AREA TABLE	AREA (SMT.)	
PLOT AREA (REF. NO.-LTS/EZ)	2886.00	
AREA GOING IN ROAD LINE	204.00	
NET PLOT AREA	2682.00	
REQ. C.P. 10%	268.20	
PROVI. C.P.	298.04	

BUILT-UP AREA TABLE	AREA (SMT.)
PROP. B.A. ON CELLAR	1806.80
PROP. B.A. ON GROUND FLOOR	1122.77
PROP. B.A. ON 1ST. FLOOR	1122.77
PROP. B.A. ON 2ND. FLOOR	1122.77
PROP. B.A. ON 3RD. FLOOR	1122.77
PROP. B.A. ON 4TH. FLOOR	991.66
PROP. B.A. ON 5TH. FLOOR	294.69
PROP. B.A. ON STAIR CABIN	318.16
PROP. B.A. ON LIFT MACHINE RM. + O.H.W.T.	141.40
TOTAL PROP. BUILT UP AREA	8043.79

F.S.I AREA TABLE	SMT.
PLOT AREA	2886.00
PERMI. F.S.I. (2886.00 x 1.00)	2886.00
PERMI. CHARGEABLE F.S.I. (2886.00 x 0.80)	2308.80
TOTAL PERMI. F.S.I.	5194.80
PROP. F.S.I. ON G.F.	674.63
PROP. F.S.I. ON F.F.	1067.26
PROP. F.S.I. ON S.F.	1067.26
PROP. F.S.I. ON T.F.	936.15
PROP. F.S.I. ON 4TH. FL.	241.40
PROP. F.S.I. ON 5TH. FL.	241.40
TOTAL PROP. F.S.I.	5053.96

CHARGEABLE F.S.I. (5053.96 x 2886.00)	2167.96
---------------------------------------	---------

FLOOR	USE	EQ. TENA.	FLR. AREA
CELLAR	PARKING	-	-
GR. FLR.	SHOP	10	590.42
1ST. FLR.	OFFICE	2	807.58
2ND. FLR.	OFFICE	2	850.48
3RD. FLR.	OFFICE	2	860.48
4TH. FLR.	OFFICE	2	709.53
5TH. FLR.	OFFICE	2	226.39
TOTAL	COMM.+PARK.	20	4034.88

COLOUR NOTE	
PLOT BOUN.	—
PROP. WORK	—
CHAR. F.S.I.	—
P.W.	—
ROAD	—
FIRE	—
TREE	—
DUST BIN	—

Developer
Jagdish G. Hirpara
AMC Developer Licence
No.162230220, DL24/02/2015
Valid up to 03/08/2018

OWNER
RAJESH P. PATEL
STR. DESIGNER (GP. ADE-1)
REG. NO. SD03382209 20 P.1
101, AVARNAVA APPTS.,
PRASHA COLONY,
UR. USHMANPURA UNDER BRIDGE,
USHMANPURA, AHMEDABAD-13.

ARCHITECT/ENGG.
ATISH D. PUROHIT
Eng.LIC. No. 0902210118
97554, Durga Chowk
G.H.B. Chandkheda,
AHMEDABAD-382424

STR. ENGG.
Ahmedabad Municipal Corporation
Case No.: BLNTEZ/11114/GDR/AS112/R0/M1
Zone: East
Plan Approved as per terms and condition mentioned in the Commencement Certificate
Rajia Chhithi Number: 824711114/AS112/R0/M1
Date: 18/05/2018
Sub-inspector (Civil Center) Asst. T.D.O. Jast. E.O. (Civil Center) Rajendra Jadhav Dy.T.D.O. East DILIP S. GOR Dy MC East

SCRUTINIZE COPY
DATE: 18/05/2018
TDO, BPS, AMC



VISITORS PARKING	
(V1) 7.96x3.71x214.16=82.62	
(V2) 6.72x4.26x2x8.18=44.91	
(V3) (6.77x3.77)x2x9.98=52.59	
(V4) 6.78x3.78x2x9.98=52.69	
(V5) 5.31x4.35x2x3.18=18.156	(IN FRONT) =262.48
(V6) 4.35x3.26x2= 7.09	
(V7) 5.44x0.79x2x3= 2.87	
(V8) 11.41x0.91x2x3.75= 4.35	
(V9) (13.66x15.75)x216.00=235.26	(IN C.P.+OPEN) =234.28
LESS: 0.50x2.00= 1.00	
(V10) 4.35x2.09=9.09 (IN H.P.)	
(V11) 3.02x0.89=2.08 (IN H.P.)	
TOTAL VISITORS PARKING=507.93 SMT.	

RESPONSIBILITY (S.O.C.R. 43.4 & 4.6) :-

APPROVAL OF DRAWINGS AND ACCEPTANCE OF ANY STATEMENT, DOCUMENT, STRUCTURAL REPORT, STRUCTURAL DRAWINGS, PROGRESS CERTIFICATE OR BUILDING COMPLETION CERTIFICATES SHALL NOT DISCHARGE THE OWNER, ENGINEER, ARCHITECT, CLERK OF WORKSITE SUPERVISOR, STRUCTURAL DESIGNER, DEVELOPER FROM THEIR RESPONSIBILITIES IMPOSED UNDER THE ACT, THE DEVELOPMENT CONTROL REGULATIONS AND THE LAWS OF TAMIL NADU AND LOCAL ACTS.

NOTWITHSTANDING ANY DEVELOPMENT PERMISSION GRANTED UNDER THIS ACT AND THESE REGULATIONS, ANY PERSON UNDERTAKING ANY DEVELOPMENT WORK SHALL CONTINUE TO BE WHOLLY AND SOLELY LIABLE TO ANY ONE IN OR AROUND THE AREA DURING SUCH CONSTRUCTION AND NO LIABILITY WHATSOEVER IN THIS REGARD SHALL BE CAST ON THE AUTHORITY.

	
<i>Jagdish</i> Jagdish G. Hirpara AMC Developer Licence No.162230220, Dt.24/02/2015 Valid up to 03/09/2018 DEVELOPER	

Ashwin Singh H. Sawvayay
 (Mia)
 Kanchan A. Sawvayay
 Saydha 90707
 Man N. Englonki
 OWNER H. Sawvayay
 C.O.W.

<i>Handwritten signature</i> RAJESH P. PATEL STR. DESIGNER (GRADE-I) REG. NO. SD0338220920 R1 101, AVARNAYA APPTS., PRABHA COLONY, NR. USHMANPURA UNDER BRIDGE, USHMANPURA, AHMEDABAD-13.	<i>Handwritten signature</i> ATISH D. PUROHIT Eng LIC. No. 0602210118 97/854, Dadas Ghosh, G.H.B. Chanchheda, Ahmedabad - 382424
--	---

--	--

Ahmedabad Municipal Corporation
 Case No.: BLNTEVE111114/GDR/A3112/R0/M1
 Zone: East
 Plan Approved as per terms and condition mentioned in the Commencement Certificate
 Raja Chhitti Number: 8247/11114/A3112/R0/M1
 Date: 18/11/16
 Sd/- Inspector (Civil Control)
 Sd/- Asst. T.D.O. Asst. E.O.
 Rajendra Jadhav Dy.T.D.O. Dilip S. GOR Dy MC Asst

