PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

REVISED LAY-OUT PLAN FOR :- RESIDENTIAL PURPOSE & SCHOOL BLGD. SUB PLOT NO :-1 + ROW HOUSE SUB PLOT NO :-2 ,ON BLOCK NO: 320/1 MOJE :- KAMREJ, TAL.:- KAMREJ, DIST:- SURAT.

BUILDING PLAN
A TO G TYPE

TYPE - A = 08 UNIT

BUILT UP AREA CAL. - A - TYPE

GROUND FL. AREA
3.00 X 7.20 = 21.60 sq. mt.
21.60 X 8 UNIT = 172.80 sq. mt.

FIRST FL. AREA
3.00 X 7.20 = 21.60 sq. mt.
21.60 X 8 UNIT = 172.80 sq. mt.

STAIR CABIN AREA
2.14 X 3.61 = 7.72 sq. mt.
7.72 X 8 = 61.76 sq. mt.

TOTAL AREA
G.F. + F.F. + STAIR CABIN
172.80 + 172.80 + 61.76 = 407.36

TYPE - B = 15 UNIT

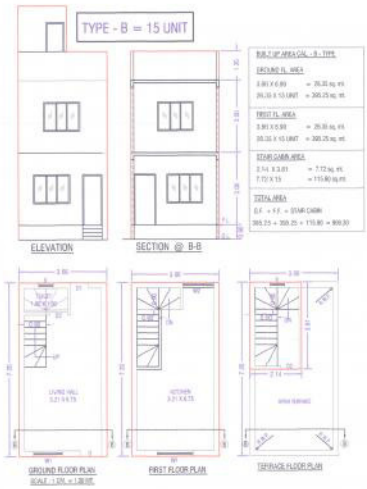

BUILT UP AREA CAL. - B - TYPE

GROUND FL. AREA
3.00 X 6.80 = 20.40 sq. mt.
20.40 X 15 UNIT = 306.00 sq. mt.

FIRST FL. AREA
3.00 X 6.80 = 20.40 sq. mt.
20.40 X 15 UNIT = 306.00 sq. mt.

STAIR CABIN AREA
2.14 X 3.61 = 7.72 sq. mt.
7.72 X 15 = 115.80 sq. mt.

TOTAL AREA
G.F. + F.F. + STAIR CABIN
306.00 + 306.00 + 115.80 = 727.80

TYPE - C = 23 UNIT

BUILT UP AREA CAL. - C - TYPE

GROUND FL. AREA
3.00 X 7.30 = 21.90 sq. mt.
21.90 X 23 UNIT = 503.70 sq. mt.

FIRST FL. AREA
3.00 X 7.30 = 21.90 sq. mt.
21.90 X 23 UNIT = 503.70 sq. mt.

STAIR CABIN AREA
2.14 X 3.61 = 7.72 sq. mt.
7.72 X 23 = 177.56 sq. mt.

TOTAL AREA
G.F. + F.F. + STAIR CABIN
503.70 + 503.70 + 177.56 = 1184.96

અત્રેની કચેરીનાં પત્ર નં.-સી.-૧૧ ..... તા. ૯/૧૨/૧૯ થી મળેલ જાણકારી મુજબની અરજીને અધિન તેમજ લે-આઉટ પ્લાન/સ્કીમ પ્લાનમાં લાગુ પડતી દર્શાવેલ સુધારા / કેફિયત ને અધિન રહી લે-આઉટ પ્લાન મંજુર / શરતી મંજુર કરવા ભલામણ કરવામાં આવે છે.

નગર નિયોજક
સુરત.

TYPE - D = 290 UNIT

BUILT UP AREA CAL. - D - TYPE

GROUND FL. AREA
3.00 X 7.30 = 26.71 sq. mt.
26.71 X 290 UNIT = 7743.90 sq. mt.

FIRST FL. AREA
3.00 X 7.30 = 26.71 sq. mt.
26.71 X 290 UNIT = 7743.90 sq. mt.

STAIR CABIN AREA
2.14 X 3.61 = 7.72 sq. mt.
7.72 X 290 = 2238.80 sq. mt.

TOTAL AREA
G.F. + F.F. + STAIR CABIN
7743.90 + 7743.90 + 2238.80 = 17726.60

TYPE - E = 99 UNIT

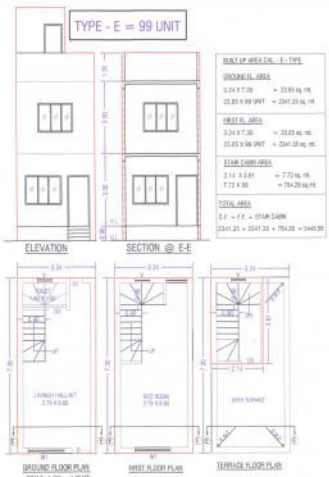

BUILT UP AREA CAL. - E - TYPE

GROUND FL. AREA
3.24 X 7.30 = 23.65 sq. mt.
23.65 X 99 UNIT = 2341.35 sq. mt.

FIRST FL. AREA
3.24 X 7.30 = 23.65 sq. mt.
23.65 X 99 UNIT = 2341.35 sq. mt.

STAIR CABIN AREA
2.14 X 3.61 = 7.72 sq. mt.
7.72 X 99 = 764.28 sq. mt.

TOTAL AREA
G.F. + F.F. + STAIR CABIN
2341.35 + 2341.35 + 764.28 = 5446.98

TYPE - F = 04 UNIT

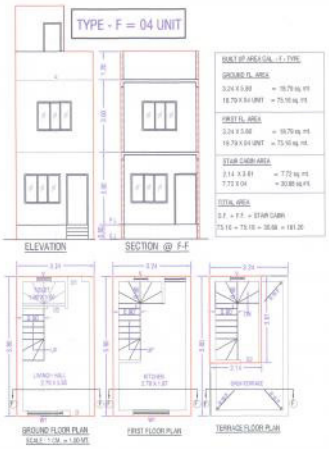

BUILT UP AREA CAL. - F - TYPE

GROUND FL. AREA
3.24 X 5.00 = 16.79 sq. mt.
16.79 X 04 UNIT = 75.16 sq. mt.

FIRST FL. AREA
3.24 X 5.00 = 16.79 sq. mt.
16.79 X 04 UNIT = 75.16 sq. mt.

STAIR CABIN AREA
2.14 X 3.61 = 7.72 sq. mt.
7.72 X 04 = 30.88 sq. mt.

TOTAL AREA
G.F. + F.F. + STAIR CABIN
75.16 + 75.16 + 30.88 = 181.20

TYPE - G = 08 UNIT

BUILT UP AREA CAL. - G - TYPE

GROUND FL. AREA
3.08 X 3.60 = 21.22 sq. mt.
21.2 X 08 UNIT = 169.76 sq. mt.

FIRST FL. AREA
3.08 X 3.60 = 21.22 sq. mt.
21.2 X 08 UNIT = 169.76 sq. mt.

STAIR CABIN AREA
2.14 X 3.61 = 7.72 sq. mt.
7.72 X 08 = 61.76 sq. mt.

TOTAL AREA
G.F. + F.F. + STAIR CABIN
169.76 + 169.76 + 61.76 = 401.28

ESTIMATE OF CONTROL

COST	G - 1,000.00
	F - 1,000.00
	E - 1,750.00
AMOUNT	G - 1,000.00
	F - 1,000.00
	E - 1,000.00
DEPOSIT	G - 3,000.00

EXISTING BUILDING

PROPOSED WORK BUILDING

OWNER SIGNATURE

Sourabh Khamar

(1) [illegible]

ARCHITECT

K.D.UPADHYAY
(B.E.Civil)
26, Amardham Row House, Near Hanuman Chowk,Rander Road, Surat. SUDA-L-ER-087 SUDA-L-STR-140

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT